



ETA-Danmark A/S  
Göteborg Plads 1  
DK-2150 Nordhavn  
Tel. +45 72 24 59 00  
Fax +45 72 24 59 04  
Internet [www.etadanmark.dk](http://www.etadanmark.dk)

Authorized and notified according  
to Article 29 of the Regulation  
(EU) No 305/2011 of the  
European Parliament and of the  
Council of 9 March 2011

MEMBER OF EOTA



## European Technical Assessment ETA-23/0482 of 2026/01/07

### I General Part

**Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S**

**Trade name of the construction product:**

RECA dimos anchor UNI-RT 12  
RECA dimos anchor UNI-RT 16

**Product family to which the above construction product belongs:**

Distance fixing system

**Manufacturer:**

RECA NORM GmbH  
Am Wasserturm 4  
DE-74635 Kupferzell  
Tel + 49 7944 61-0  
Internet: [www.recanorm.de](http://www.recanorm.de)

**Manufacturing plant:**

RECA plant no.4

**This European Technical Assessment contains:**

30 pages including 25 annexes which form an integral part of the document

**This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:**

EAD 331985-00-0604 – Distance fixing system

**This version replaces:**

The ETA with the same number issued on 2023-09-05

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (except the confidential Annexes referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

## II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

### 1 Technical description of product

RECA dimos anchor UNI-RT 12 and RECA dimos anchor UNI-RT 16 are post-installed anchor systems placed into predrilled holes in concrete, in masonry and autoclaved aerated concrete and anchored by bonding.

RECA dimos anchor UNI-RT 12 and RECA dimos anchor UNI-RT 16 distance mounting system consist of a M12 or M16 threaded rod made from carbon steel or stainless steel and a thermal separation module made from polyamide. The fixing system is placed into a pre-drilled hole perpendicular to the surface (maximum deviation 5°) in masonry or concrete, and anchored by bonding the threaded rod element to the wall of the drilled hole.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)

The intended use is fixings through an ETICS into the loadbearing wall of heavy-duty fixtures such as awnings, French balconies, canopies, satellite dishes, etc.

The system is used for distance mountings in the following insulated base materials:

- Normal weight cracked or non-cracked concrete (base material group a)
- Solid masonry bricks (base material group b)
- Perforated or hollow bricks (base material group c)
- autoclaved aerated concrete (base material group d)

Reference to base material group in EAD 330499-02-0601 and EAD 330076-00-0604.

Anchorage subject to: Static or quasi-static loads.

Temperature range:

- T1: -40°C to +40°C (max. short-term +40°C and max. long-term temperature +24°C)
- T2: -40°C to +80°C (max. short-term +80°C and max. long-term temperature +50°C)

The minimum and the maximum installation temperature are specified by the manufacturer within the above range.

Use categories in respect of use:

Category d/d: Use in dry masonry and concrete  
Category w/w: Use in wet masonry only.

This ETA applies only where concrete or masonry members in which the distance mounting systems are embedded are subject to static or quasi static actions in tension, pressure, shear or combined tension and shear or pressure and shear or bending.

In case of a product use in ETICS or façade insulation systems, it must be ensured that no ETICS or facade insulations systems influence the loadbearing capacity in the base material.

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Characteristics of product

##### Safety in case of fire (BWR 2):

No Performance assessed

##### Safety in use (BWR 4):

Resistance of the M12 resp. M16 threaded rods respectively fixed with injection mortar in the base material masonry, and autoclaved aerated concrete:

The M12 resp. M16 threaded rods with material specification as stated in annex A5 are covered by the following ETAs based on EAD 330076-00-0604 which provides the relevant performances:

- ETA-13/0909 (VMU plus / VMU plus polar)
- ETA-17/0006 (VM-EA)

Resistance of the M12 and M16 threaded rod respectively fixed with injection mortar in the base material concrete:

The M12 and M16 threaded rods respectively with material specification as stated in annex A5 are covered by the following ETAs based on EAD 330499-01-0601 which provides the relevant performances:

For cracked and uncracked concrete

- ETA-11/0415 (VMU plus / VMU plus polar)

For uncracked concrete:

- ETA-16/0898 (VM-EA)

Resistance of the thermal separation module

- Characteristic resistance of the thermal separation module transferring load to failure under tension loading
- Characteristic resistance of the thermal separation module transferring load to failure under pressure loading
- Characteristic resistance of the thermal separation module transferring load to failure under shear loading
- Characteristic resistance to failure under pressure load and displacement (buckling of cantilever arm)

- Characteristic resistance to failure under combined shear and pressure load and displacements (buckling of cantilever arm)
- Characteristic resistance under shear loads and displacements (failure of plastic part transferring load, cantilever arm)
- Maximum installation torque moment

The above essential characteristics are detailed in Annex C.

#### Durability

The verification of durability is part of testing of the essential characteristics. Durability is only ensured if the specifications of intended use according to Annex B are taken into account.

#### 3.2 Methods of assessment

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Requirements 4 has been made in accordance with the EAD 331985-00-0604 – Distance mounting system.

#### **4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base**


##### **4.1 AVCP system**

According to the decision 97/463/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 2+.

#### **5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking.


Issued in Copenhagen on 2026-01-07 by

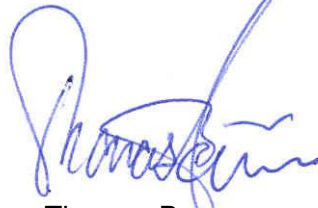


Thomas Bruun

Managing Director, ETA Danmark

### Distance mounting system dimos anchor UNI-RT 12

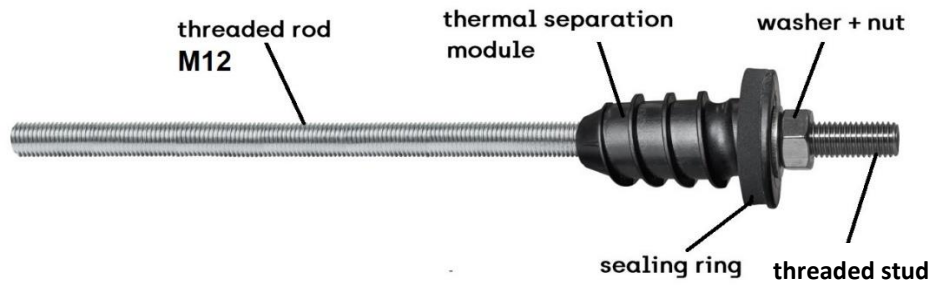

### Distance mounting system dimos anchor UNI-RT 16

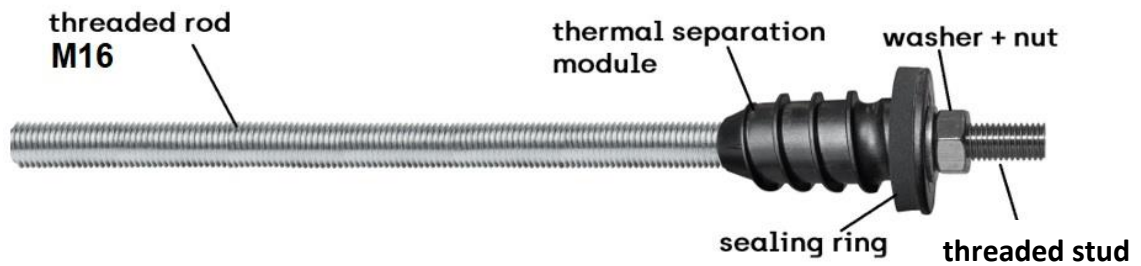


RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Product description**  
View and profile of the products


**Annex A1**

**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16 installed conditions**

**Single fixing – anchor’s free end is rotatable under an acting shear load**

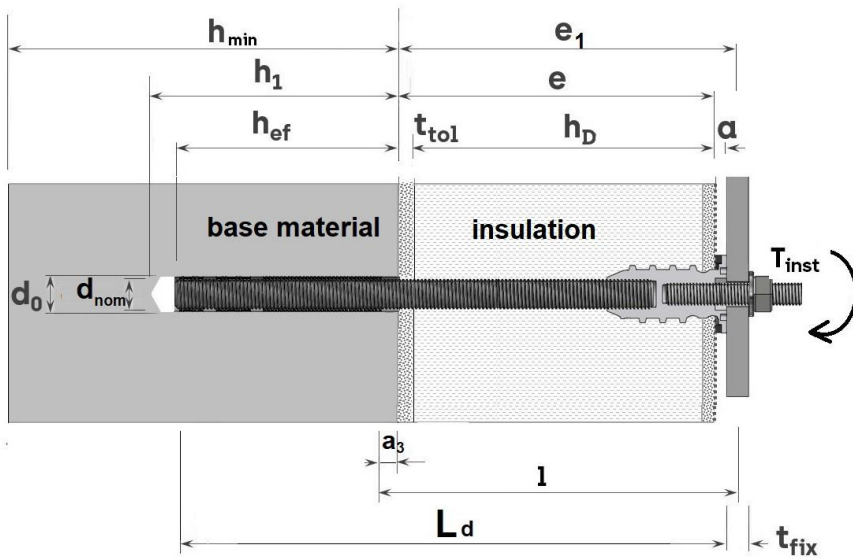

**Multiple fixing – anchor’s free end is not rotatable under an acting shear load, provided that the fixed baseplate is sufficiently rigid**

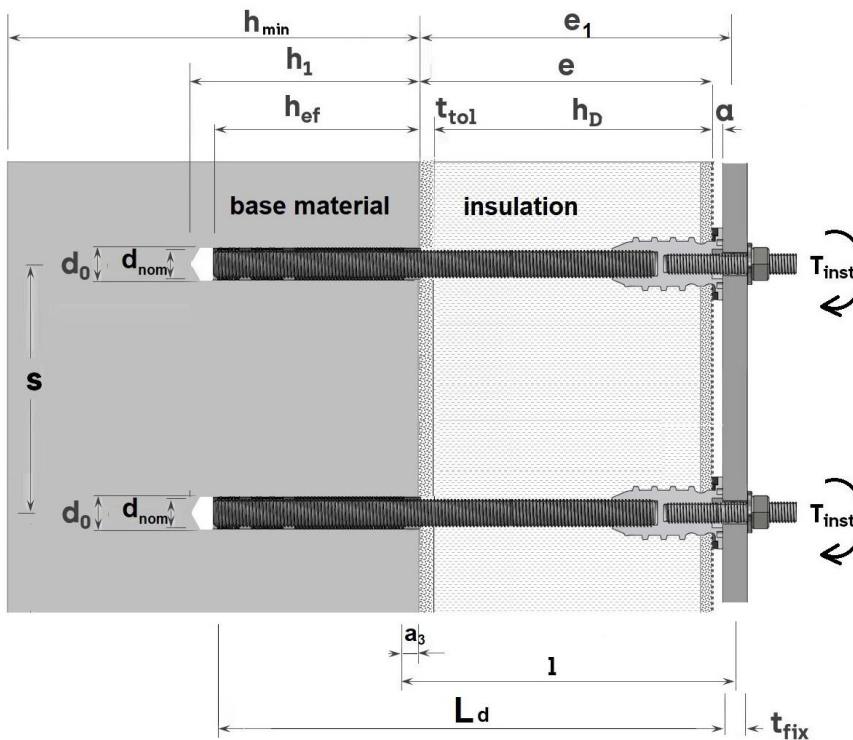


RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16


**Product description**  
Installed conditions single fixing and multiple fixings

**Annex A2**

**dimos anchor UNI-RT 12 installed conditions**

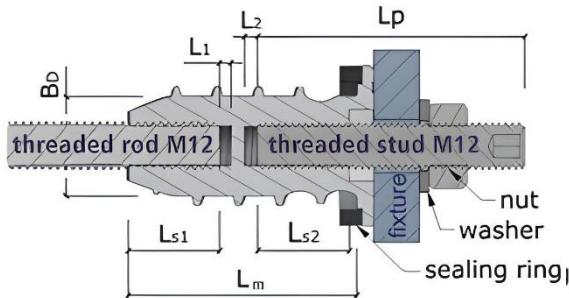

**dimos anchor UNI-RT 16 installed conditions**

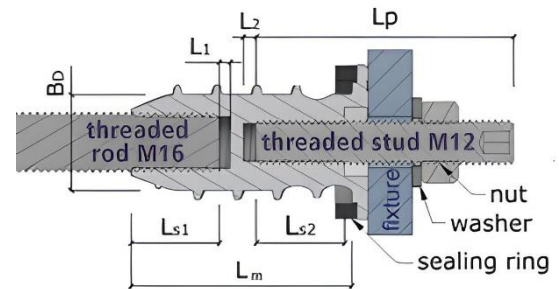

**Table A3.1: Specifications for the installation**


			UNI-RT 12	UNI-RT 16
Total length incl. threaded rod	$L_d$	[mm]	$\leq 302$	$\leq 392$
Length of the thermal separation module	$L_m$	[mm]	60	
Core diameter of the thermal separation module	$B_D$	[mm]	26	
Diameter cover disc	$K_D$	[mm]	42	
Diameter of threaded rod	$d_{nom}$	[mm]	12	16
Thickness of non-load bearing plaster, adhesive or similar materials	$t_{tol}$	[mm]	optional	optional
Insulation thickness (incl. insulation plaster)	$h_D$	[mm]	60 - 220	60 - 300
Lever arm for shear load for calculation of shear load with lever arm	$l$	[mm]	$a_3 + e_1$	
Distance between surface of base material to the plaster surface (non-bearing materials)	$e$	[mm]	$h_D + t_{tol}$	
Distance between shear load and surface of the base material	$e_1$	[mm]	$e + a + t_{fix} / 2$	
Gap between plaster surface and fixture	$a$	[mm]	3 – 3,5	
Additional length for lever arm	$a_3$	[mm]	$0,5 * d_{nom}$	
Min. screw-in depth M12 resp. M16 threaded rod	$L_{s1}$	[mm]	24	
Min. screw-in depth M12 threaded stud	$L_{s2}$	[mm]	24	
Adjusting length M12 resp. M16 threaded rod (base material side)	$L_1$	[mm]	3	
Adjusting length M12 threaded stud (fixture side)	$L_2$	[mm]	3,5	
Spacing between threaded rods	$s$	[mm]	in accordance with ETA of injection mortar	

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Product description**  
Installed conditions


**Annex A3**

**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16 installed conditions to ensure sealing against driving rain (water tightness in accordance with EN 1027 – method 1A)**

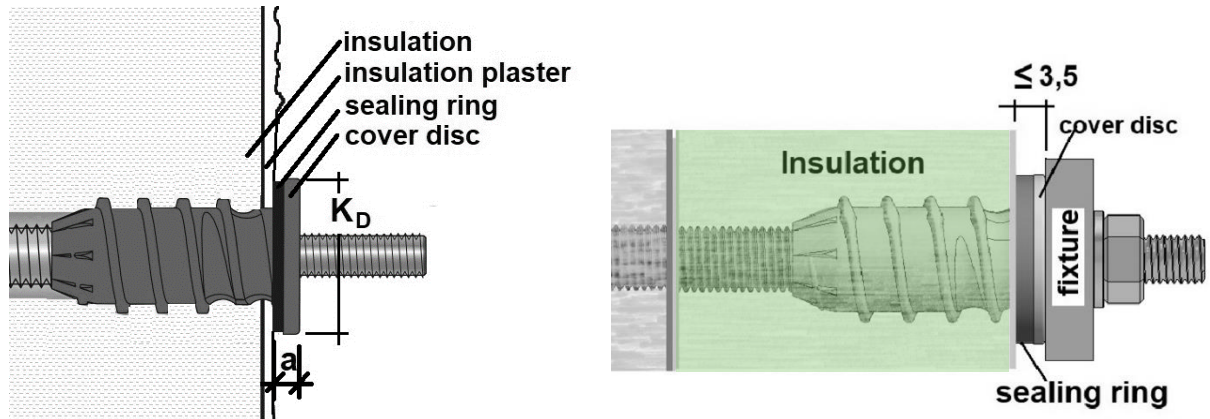

Installation with max. distance of plaster to fixture to ensure water tightness ( $a \leq 3,5 \text{ mm}$ )

**Marking:**

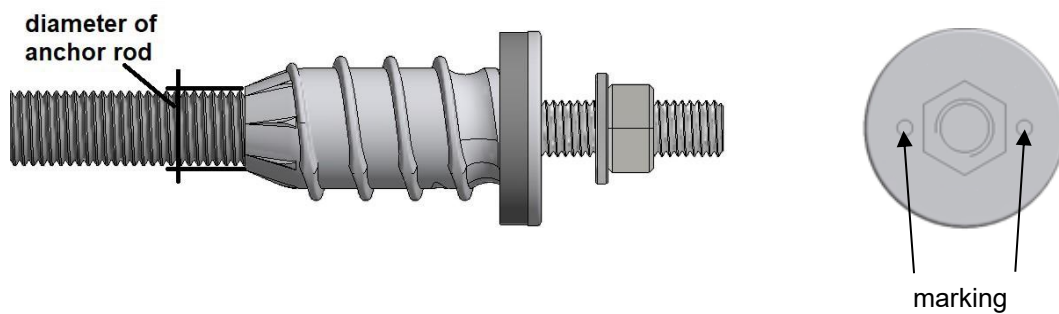

Marking:	Brand	Type	diameter of threaded rod
<b>Example:</b>	<b>2 holes</b>	<b>dimos anchor</b>	<b>16 resp. 12</b>
	<b>for</b>	<b>UNI-RT</b>	
	<b>RECA</b>		
	<b>marking</b>		

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Product description**  
Installed conditions for driving rain tightness. - Marking.

**Annex A4**

**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16 single parts and materials**



**Accessories:**



**M12**

**M10**

**Pos 3a**



**Pos 7**

**Table A 5.1: Parts and Materials**

Pos	Designation	Material
1	Threaded rod M12 or Threaded rod M16	Steel zinc plated galvanized $\geq 5\mu\text{m}$ in accordance with EN ISO 4042:2018 Property class EN-ISO 898-1 (2013) $f_{yk} \geq 640 \text{ N/mm}^2$ , $f_{uk} \geq 800 \text{ N/mm}^2$ or stainless steel A4 in accordance with EN 10088-3:2014 material 1.4401 or 1.4571 ( $f_{yk} \geq 450 \text{ N/mm}^2$ , $f_{uk} \geq 700 \text{ N/mm}^2$ , strength class 70)
2	Thermal separation module	Polyamide PA 6 with glass fiber
3	Threaded stud M12	Stainless steel A4 in accordance with EN 10088-3:2014 material 1.4401 or 1.4571 $f_{yk} \geq 450 \text{ N/mm}^2$ , $f_{uk} \geq 700 \text{ N/mm}^2$
	or alternative	
3a	reduction threaded stud M12/M10	
3b	or M12 screw	
4	sealing ring	Material: EPDM (min. $41,5 \times 37,5 \times 6 \text{ mm}^3$ )
5	Hexagon nut M12	Stainless steel A4 in accordance with EN 10088-3:2014 material 1.4401 or 1.4571 in accordance with DIN EN ISO 4032
6	Washer	Stainless steel A4 in accordance with DIN 125 or 440
7	Optional: distance washer for M12, in accordance with DIN 9021	Polyamide, $37 \times 13 \times 3 \text{ mm}$ (white or black)

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Product description**  
Single parts and material

**Annex A5**

**Specification of intended use**

**Anchorage subject to:**

- Static and quasi-static actions in tension, pressure, shear or combined tension and shear or combined pressure and shear load. The anchor shall not be used for the transmission of dead loads of the thermal insulation composite system.

**Base material:**

**Masonry and autoclaved aerated concrete – in accordance with ETA’s**

- ETA-13/0909 (VMU plus / VMU plus polar)
- ETA-17/0006 (VM-EA)

**Cracked and uncracked concrete – in accordance with ETA’s**

- ETA-11/0415 (VMU plus / VMU plus polar)

**Uncracked concrete – in accordance with ETA’s for uncracked concrete**

- ETA-16/0898 (VM-EA)

**Temperature Range for use - if not restricted by injection mortar ETA:**

**Masonry**

- T<sub>a</sub>: - 40°C to + 40°C (max. temperature: short-term +40°C and long-term +24°C)
- T<sub>b</sub>: - 40°C to + 80°C (max. temperature: short-term +80°C and long-term +50°C)

**Concrete**

- T1: - 40°C to + 40°C (max. temperature: short-term +40°C and long-term +24°C)
- T2: - 40°C to + 80°C (max. temperature: short-term +80°C and long-term +50°C)

**Use conditions (Environmental conditions)**

The use conditions for the base materials are given in the above-mentioned ETA’s for the respective substrates.

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Product description**  
Specification of intended use

**Annex B1**

**Steel parts in respect of installation and application conditions:**

The intended use regarding environmental conditions of anchors with components made of stainless steel, results from their corrosion resistance class according (CRC) in accordance with EN 1993-1-4:2006+A1:2015, Table A.3 in connection with EN 1993-1-4:2006+A1:2015, Table A.2 and A.1.

- The fastener consisting of exterior and interior parts made of stainless-steel class A4 in accordance with Annex A5, table A5.1: CRC III.
- The fastener consisting of exterior parts made of stainless-steel class A4 in accordance with Annex A5, table A5.1 and interior parts made of galvanized carbon steel in accordance with Annex A5, table A5.1: CRC III, provided that the anchor and sealing ring is installed in accordance with Annex A4 and with displacement less than 1.0 mm under tension loads and less than 3.0 mm under shear loads, and with a render with a maximum grain size K3.
- Furthermore, it is required that the ETICS or insulation is designed to avoid accumulation of humidity. The fastener consisting of exterior parts made of stainless-steel class A4 according to Annex A5, table A5.1 and interior parts made of galvanized carbon steel in accordance with Annex A5, table A5.1: CRC III, provided that other suitable sealing measures are taken, such as a hybrid joint compound or e.g., a sheet metal cover is applied.

**Use conditions in respect of installation and use**

**Masonry and aerated autoclaved concrete base material - if not restricted by the injection mortar ETA:**

- Category d/d: Installation and use in dry masonry
- Category w/w: Installation and use in wet or dry masonry (incl. w/d installation in wet masonry and use in dry masonry)

**Concrete base material - if not restricted by the injection mortar ETA:**

- I1: installation in dry or wet (water saturated) concrete and use in dry or wet concrete
- I2: installation in water-filled drill holes (not sea water) and use in dry or wet concrete
- D3: downward and horizontal and upwards (e.g. overhead) installation

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Product description**  
Specification of intended use

**Annex B2**

**Design:**

- The anchorages are to be designed under the responsibility of an engineer experienced in anchorages and masonry work with the applicable safety factors.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.
- The fastener is anchored in the substrate of concrete, masonry or autoclaved aerated concrete. Any other layer, e.g. tolerance levelling layers, adhesives, plaster covering the substrate or outside plasters are considered as to be non-load bearing.
- Anchorages in concrete under static or quasi-static actions are designed in accordance with EN 1992-4:2018-09
- Anchorages in masonry under static or quasi-static actions are designed in accordance with EOTA TR 054:2016
- The anchorage design outside the base material shall be done in accordance with EOTA TR 077:2021
- $\alpha_{\text{pressure}} = 1$  for compression load for solid base material and for hollow base material with more than 4 penetrated webs.

**Installation:**

- Dry or wet structures
- Anchor Installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Hole drilling in concrete by hammer or compressed air drill mode
- Temperature of the anchor system at installation from -20°C to + 40°C.
- Exposure to UV due to solar radiation of the thermal separation module not protected  $\leq 6$  weeks.

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Product description**  
Specification of intended use

**Annex B3**

**Table B 4.1: Installation parameters in base material (see drawing in Annex A2)**


Anchor type			UNI-RT 12	UNI-RT 16
Insulation thickness incl. insulation plaster	$h_D$	[mm]	60 - 220	60 - 300
Min. thickness of member	$h_{min}$	[mm]	in accordance with injection mortar ETA	
Effective anchorage depth	$h_{ef} \geq$	[mm]		
Drill hole diameter	$d_0$	[mm]		
Depth of drill hole in the base material	$h_1 \geq$	[mm]		
Diameter of clearance hole in the fixture for the M12 threaded stud	$d_f \geq$	[mm]	13	13
Diameter of clearance hole in the fixture for the M12/M10 threaded stud	$d_f \geq$	[mm]	11	11
Length of threaded stud	$L_p \geq$	[mm]	50	50
Thickness of fixture	$t_{fix}$	[mm]	0 – 24 <sup>a)</sup> max. 200 <sup>b)</sup>	0 – 24 <sup>a)</sup> max. 200 <sup>b)</sup>
Installation torque to fix the fixture *	$T_{inst} \leq$	[Nm]	19	25

For hollow base material perforated sleeves must be used for the injection mortar, in accordance with ETA of injection mortar.

\*  $T_{inst} = 19$  Nm resp. 25 Nm are valid for the thermal separation module. Max.  $T_{inst}$  given in ETAs of injection mortar must also be observed.

a) as delivered with threaded stud M12 or with reduction threaded stud M12/M10

b) with any longer threaded rod, washer and nut which complies to the specifications given in table A 5.1 position 3 and 3a. The introduction of bending moment is not allowed. Constructive measures must be applied to exclude any bending moment

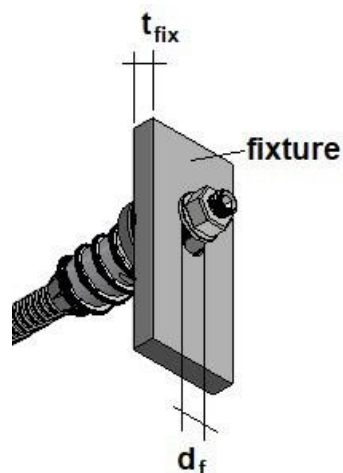


RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Intended use**  
Installation parameters

**Annex B4**

**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16: Installation instruction (in concrete or solid masonry)**

**Installation in concrete or solid brick:**

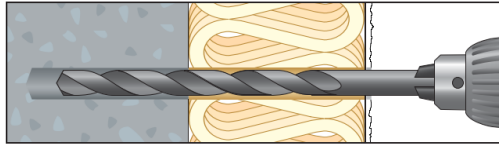


**1. Drill a hole:**

Observe the drilling method of the approval/assessment of the injection mortar.

Concrete / solid brick: hammer drilling; aerated concrete: Rotary drilling - without impact

**dimos anchor UNI-RT 12:** Drill hole diameter  $d_0 = 14$  mm, concrete: drill hole depth  $h_1 \geq 80$  mm + e, solid brick & aerated concrete:  $h_1 \geq 110$  mm + e


**dimos anchor UNI-RT 16:** Drill hole diameter  $d_0 = 18$  mm, concrete: drill hole depth  $h_1 \geq 90$  mm + e, solid brick & aerated concrete:  $h_1 \geq 110$  mm + e (e = insulation thickness incl. plaster &  $t_{tol}$ )

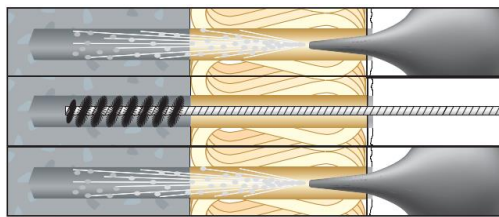

**2. Clean the drill hole:**

The drill hole must be cleaned properly; see approval/assessment of the injection system:

4x blow - 4x brush - 4x blow

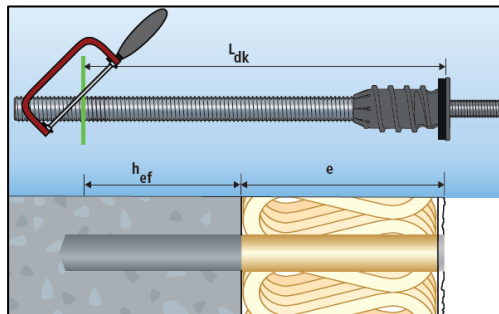

**3. Cut the dimos anchor UNI-RT to length:**

The pre-assembled threaded rod M12 / M16 is already completely screwed into the thermal separation module. Correct length  $L_{dk}$  from the tip of the threaded rod to the lower edge of the cover plate of the thermal separation module (see table):

**UNI-RT 12**

Correct length  $L_{dk} =$   
Anchorage depth  $h_{ef}$   
+ insulation thickness e

Anchoring in  
concrete

Anchoring in  
aerated concrete/solid brick

$$L_{dk} = h_{ef} + e$$

$$L_{dk} = 70 \text{ mm} + e$$

$$L_{dk} = 100 \text{ mm} + e$$

**UNI-RT 16:**

Correct length  $L_{dk} =$   
Anchorage depth  $h_{ef}$   
+ insulation thickness e

Anchoring in  
concrete


Anchoring in  
aerated concrete/solid brick

$$L_{dk} = h_{ef} + e$$

$$L_{dk} = 80 \text{ mm} + e$$

$$L_{dk} = 100 \text{ mm} + e$$

After determining the correct length, cut the threaded rod M12 / M16 to length with a metal saw.

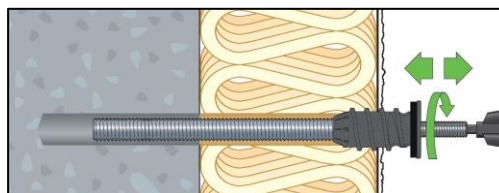

**4. Note:**

If the plaster is very thick and hard, use a  $\varnothing 26$  mm drill bit or „ream” the hole in the plaster to approx. 26 mm with the drill.


RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Intended use**  
Installation instruction in solid base material

**Annex B5**


**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16: Installation instruction (in concrete or solid masonry)**

**Installation in concrete or solid brick:**

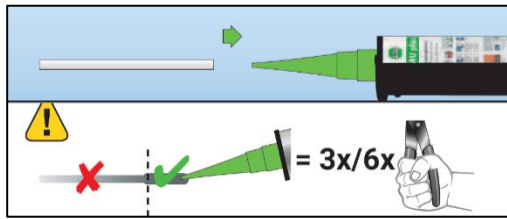

**5. Attach the mixing nozzle extension VM-X to the mixing nozzle VM-XL:**

Squeeze out the injection mortar until the mortar has a uniform grey mixing colour - discard the pre-run of at least 3 pumps (approx. 10 cm) for coaxial cartridges or at least 6 pumps for 300ml tubular film cartridges.

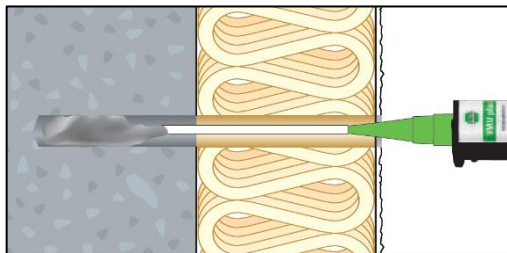

**6. Fill the drill hole with injection mortar (start from the bottom of drill hole)**


**UNI-RT 12:**

Drill hole depth $h_1$ [mm]	300 ml / 330 ml Cartridge sizes Number of pumps	420 ml Cartridge sizes Number of pumps
Concrete: 80	5-6	4-5
Solid brick/aerated concrete: 110	6-7	5-6

**UNI-RT 16**

Drill hole depth $h_1$ [mm]	300 ml / 330 ml Cartridge sizes Number of pumps	420 ml Cartridge sizes Number of pumps
Concrete: 90	5-6	4-5
Solid brick/aerated concrete: 110	6-7	5-6


**Important:** Follow the installation instructions and processing time of the injection mortar used in accordance with the approval/assessment.

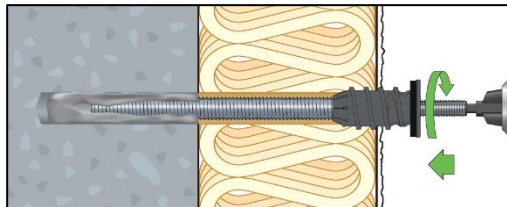


**7. Insert the hexagon bit (included in the set)**

into the M12 threaded stud and screw in the RECA dimos anchor UNI-RT using a cordless screwdriver until the seal is pressed firmly against the plaster. A standard cordless screwdriver is sufficient for this.

**Note:** The thermal separation module drills itself through the insulation. The foamed EPDM sealing ring ensures optimum sealing and can prevent driving rain from entering the insulation. For details on impermeability to driving rain see ETA and/or point 10.

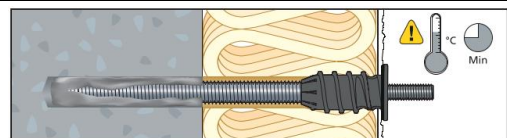

**8. Observe the curing time of the injection system, see cartridge label of the injection mortar**

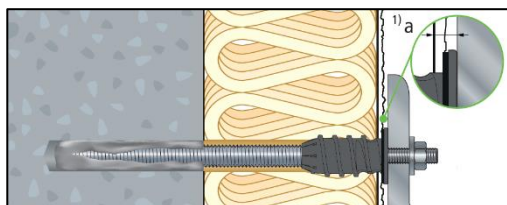

**9. Afterwards, the attachment can be mounted (max. torque  $T_{inst} = 25 \text{ Nm}$ ).**

Note: Observe an eventually varying installation torque in the ETA approval of the used injection system.

**Note:** The screw insertion depth of the M12 threaded stud in the RECA dimos anchor UNI-RT is min. 30 mm, max. 34 mm. This means that it may be unscrewed by max. 4 mm - this corresponds to approx. 2 turns.


<sup>1)</sup>  $a \leq 3,5 \text{ mm}$

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Intended use**  
Installation instruction in solid base material

**Annex B6**

**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16: Installation instruction (in concrete or solid masonry)**






	<p><b>10.If the wall is uneven, the RECA dimos anchor UNI-RT can be readjusted</b></p> <p>The unevenness can, for example, be lined with polyamide washers according to DIN 9021 with a diameter of 37x13x3 mm (Art.-No. 0421 012). The thermal separation module may be unscrewed by a maximum of 3 mm using the two-hole nut driver (Art. No. 0911 250 000). A resulting gap should be sealed with a suitable sealant (e.g. S78).</p> <p>A cover/sealing of the anchorage point is required when:</p> <ul style="list-style-type: none"> <li>• the deflection under shear stress is greater than 3 mm</li> <li>• the anchor is not perpendicular to the plaster surface</li> <li>• the grain size or roughness of the plaster is greater than 3 mm</li> <li>• the drill hole diameter in the plaster is larger than 26 mm</li> </ul> <p>With thick plaster or hard insulating material, the drill hole must be drilled out to a depth (length of the thermal break module) of 26 mm.</p>
---	--

<p>RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16</p>	<p><b>Annex B7</b></p>
<p><b>Intended use</b> Installation instruction in solid base material</p>	

**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16: Installation instruction (in hollow brick)**

**Installation in hollow base material:**

The mounting instruction uses as an example a sleeve 20-130 (diameter 20 mm with length 130 mm). Any sleeve according to the ETA of the RECA injection mortar from Annex B1 can be used.

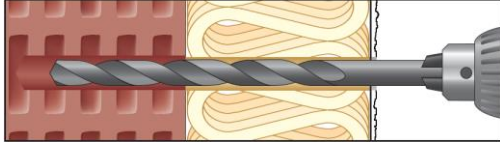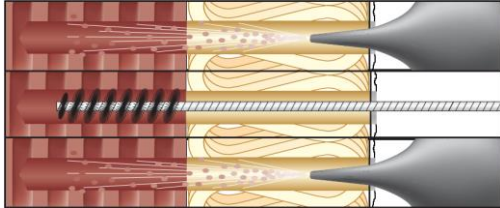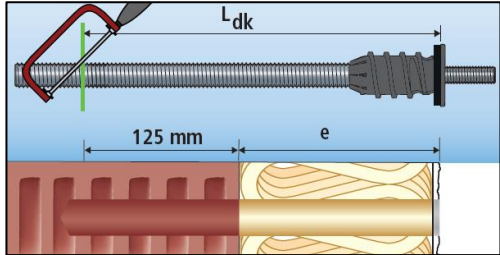
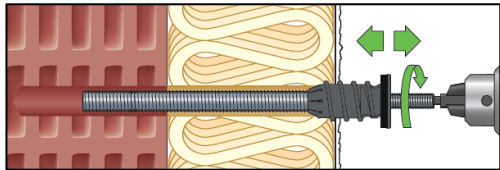
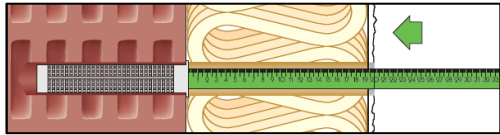

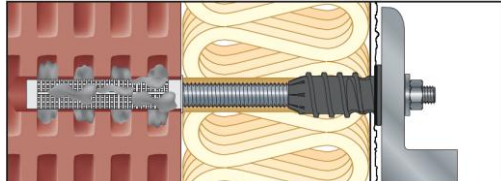
	<p><b>1. Drill a hole:</b> Observe the drilling method of the approval/assessment of the injection mortar. Perforated bricks: Rotary drilling - without impact. <b>dimos anchor UNI-RT 12 and dimos anchor UNI-RT 16:</b> Drill hole diameter <math>d_0 = 20</math> mm Drill hole depth <math>h_1 \geq 140</math> mm + e (e = insulation thickness incl. plaster &amp; <math>t_{tot}</math>)</p>
	<p><b>2. Clean the drill hole:</b> The drill hole must be cleaned properly; see approval / assessment of the injection system: 2x blow - 2x brush - 2x blow.</p>
	<p><b>3. Cut the dimos anchor UNI-RT to length</b> The pre-assembled threaded rod M12 / 16 is already completely screwed into the thermal separation module. Correct length <math>L_{dk}</math> from the tip of the threaded rod to the lower edge of the cover plate of the thermal separation module: <b>Anchorage depth in plastic sleeve (125 mm) + insulation thickness e (incl. plaster)</b> After determining the correct length, cut the threaded rod M12 / M16 to length with a metal saw.</p>
	<p><b>4. Enlarge the opening in the plaster for the collar of the plastic sleeve to 26mm.</b> To do this: Screw the thermal separation module only approx. 2 thread turns through the plaster using a cordless screwdriver and the bit included in the set. Then screw it out again. <b>Note:</b> If the plaster is very thick and hard, use a <math>\varnothing 26</math> mm drill bit or „ream” the hole in the plaster to approx. 26 mm with the drill.</p>
	<p><b>5. Push the plastic sleeve into the drill hole with the help of a folding ruler or similar</b> Then remove the folding ruler or similar from the drill hole. <b>Note:</b> This is an ideal way to ensure that the sleeve SH 20x130 is correctly inserted in the drill hole.</p>

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Intended use**  
Installation instruction in hollow masonry

**Annex B8**

**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16: Installation instruction (in hollow brick)**

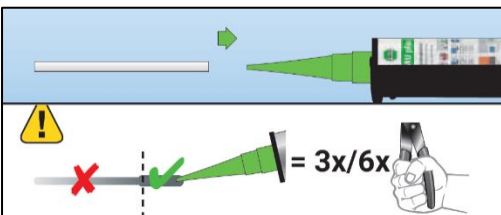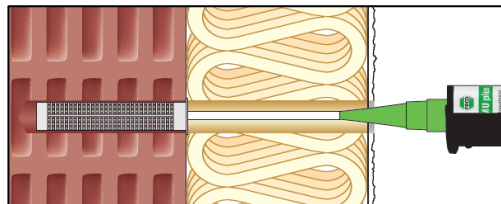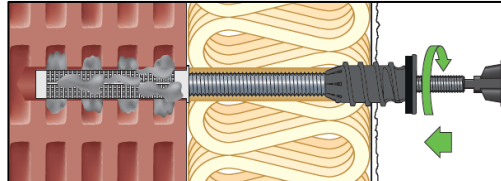
	<p><b>6. Attach the mixing nozzle extension VM-XL to the mixing nozzle VM-X</b></p> <p>Squeeze out the injection mortar until the mortar has a uniform grey mixing colour - discard the pre-run of at least 3 pumps (approx. 10 cm) for coaxial cartridges or at least 6 pumps for 300ml tubular film cartridges.</p>				
	<p><b>7. Fill the plastic sleeve with injection mortar (start from the bottom / back of the sleeve)</b></p> <p><b>UNI-RT 12 / UNI-RT 16</b></p> <table border="1" data-bbox="742 694 1460 772"> <tr> <td style="background-color: #92d050;">300 ml / 330 ml Cartridge sizes</td> <td style="background-color: #92d050;">420 ml Cartridge sizes</td> </tr> <tr> <td>13 pumps = 38 mm Scale shares</td> <td>13 pumps = 24 mm Scale shares</td> </tr> </table> <p><b>Important:</b> Follow the installation instructions and processing time of the injection mortar. The necessary information is on the label, for further information see approval/assessment.</p>	300 ml / 330 ml Cartridge sizes	420 ml Cartridge sizes	13 pumps = 38 mm Scale shares	13 pumps = 24 mm Scale shares
300 ml / 330 ml Cartridge sizes	420 ml Cartridge sizes				
13 pumps = 38 mm Scale shares	13 pumps = 24 mm Scale shares				
	<p><b>8. Insert the hexagon bit (included in the set)</b> into the M12 threaded stud and screw in the RECA dimos anchor UNI-RT using a cordless screwdriver until the sealing ring is pressed firmly against the plaster. A standard cordless screwdriver is sufficient for this.</p> <p><b>Note:</b> The thermal separation module drills itself through the insulation. The foamed EPDM sealing ring ensures optimum sealing and can prevent driving rain from entering the insulation. For details on impermeability to driving rain see ETA and/or point 11.</p>				
	<p><b>9. Observe the curing time of the injection mortar (see label)!</b></p>				
	<p><b>10. Afterwards, the attachment can be mounted (max. torque Tinst = 25 Nm).</b></p> <p>Note: Observe an eventually varying installation torque in the ETA approval of the used injection system.</p> <p><b>Note:</b> The screw insertion depth of the M12 threaded stud in the RECA dimos anchor UNI-RT is min. 30 mm, max. 34 mm. This means that it may be unscrewed by max. 4 mm - this corresponds to approx. 2 turns.</p> <p><sup>1)</sup> a ≤ 3,5 mm</p>				

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Intended use**  
Installation instruction in hollow masonry

**Annex B9**

**dimos anchor UNI-RT 12, dimos anchor UNI-RT 16: Installation instruction (in hollow brick)**

	<p><b>11. If the wall is uneven, the RECA dimos anchor UNI-RT can be readjusted</b></p> <p>The unevenness can, for example, be lined with polyamide washers according to DIN 9021 with a diameter of 37x13x3 mm (Art.-No. 0421 012). The thermal separation module may be unscrewed by a maximum of 3 mm using the two-hole nut driver (Art. No. 0911 250 000). A resulting gap should be sealed with a suitable sealant (e.g. S78).</p> <p>A cover/sealing of the anchorage point is required when:</p> <ul style="list-style-type: none"> <li>• the deflection under shear stress is greater than 3 mm</li> <li>• the anchor is not perpendicular to the plaster surface</li> <li>• the grain size or roughness of the plaster is greater than 3 mm</li> <li>• the drill hole diameter in the plaster is larger than 26 mm</li> </ul> <p>With thick plaster or hard insulating material, the drill hole must be drilled out to a depth (length of the thermal break module) of 26 mm.</p>
---	---

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Intended use**  
Installation instruction in hollow masonry

**Annex B10**

**Table B11.1: Conditions for proper installation and additional advice for installation**

Note: Driving rain resistance must be designed in accordance with the provisions given in Annex B2 for fasteners with an interior part made of galvanized steel.

UNI-RT 12, UNI-RT 16					
ETICS* with insulation panels made of					
		XPS EPS	Mineral wool, compression strength $\geq 5$ kPa**	wood fiber, raw density $\leq 230\text{kg/m}^3$ and compression strength $\leq 100$ kPa	wood fiber, raw density $>230\text{kg/m}^3$ or compression strength $> 100$ kPa
ETICS rendered with plaster	$\leq 8$ mm rendering thickness	Standard installation in accordance with annex B5, B6, B7, B8, B9 and B10			Drill the hole through the insulation and in the base material with a regular drill bit. Afterwards, enlarge the hole in the plaster and insulation to diameter 26 mm to a depth of 60 mm. For this purpose a wood drill bit may be used.
	$>8$ mm rendering thickness	Drill the hole through the insulation and in the base material with a regular drill bit. Afterwards, enlarge the hole in the plaster to $d=26$ mm by using e.g. a wood drill bit.			

\* External Thermal Insulations Composite Systems (ETICS) or rendered insulation with reinforced plaster which are glued only or glued and mechanically fixed.

\*\*  $\geq 5$  kPa is a guideline value that the thermal separation module can apply sufficient pre-tensioning force in the insulation panel to ensure the compression of the sealing ring.

The values stated are to be understood as guideline values in order to give the user the highest possible application safety.

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Intended use**

Conditions for proper installation and additional advice for installation

**Annex B11**

**Table C1.1: Characteristic tensile load resistance  $N_{Rk,s}$  of the threaded rods**

UNI-RT 12, UNI-RT 16				
Type	Cross section of threaded rod	Nominal tensile strength of threaded rod	Char. tensile load resistance	safety factor
	$A_s$	$f_{uk}$	$N_{Rk,s}$	$\gamma_{Ms}^*$
	[mm <sup>2</sup> ]	[N/mm <sup>2</sup> ]	[kN]	[-]
UNI-RT 12 (M12 rod 8.8, carbon steel)	84,3	800	67,4	1,50
UNI-RT 12 (M12 rod A4-70)	84,3	700	59,0	1,87
UNI-RT 16 (M16 rod 8.8, carbon steel)	157,0	800	125,6	1,50
UNI-RT 16 (M16 rod A4-70)	157,0	700	109,9	1,87

$$N_{Rk,s} = A_s * f_{uk}$$

\*In absence of other national regulations

**Table C1.2: Characteristic shear load resistance  $V_{Rk,s}$  without lever arm and characteristic bending resistance  $M_{Rk,s}$  of the threaded rods**

UNI-RT 12, UNI-RT 16			
Type	Char. shear load resistance	Char. bending resistance	safety factor
	$V_{Rk,s}$	$M_{Rk,s}$	$\gamma_{Ms}^*$
	[kN]	[Nm]	[-]
UNI-RT 12 (M12 rod 8.8, carbon steel)	33,7	104,7	1,25
UNI-RT 12 (M12 rod A4-70)	29,5	91,6	1,56
UNI-RT 16 (M16 rod 8.8, carbon steel)	62,8	265,5	1,25
UNI-RT 16 (M16 rod A4-70)	55,0	232,3	1,56

$$V_{Rk,s} = 0,5 * A_s * f_{uk}$$

$$M_{Rk,s} = 1,2 * W_{el} * f_{uk} \quad \text{with} \quad W_{el} = \pi * d_s^3 / 32$$

for M16:  $d_s = 14,14$  mm      for M12:  $d_s = 10,36$  mm

\*In absence of national regulations


RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

### Performances

Characteristic tensile load, shear load and bending moment of threaded rod

**Annex C1**

**Table C2.1: Characteristic buckling load resistance  $P_{Rk,ca}$  for the system of threaded rod and thermal separation module under pressure load with or without shear load displacement ( $\delta_v$ )**

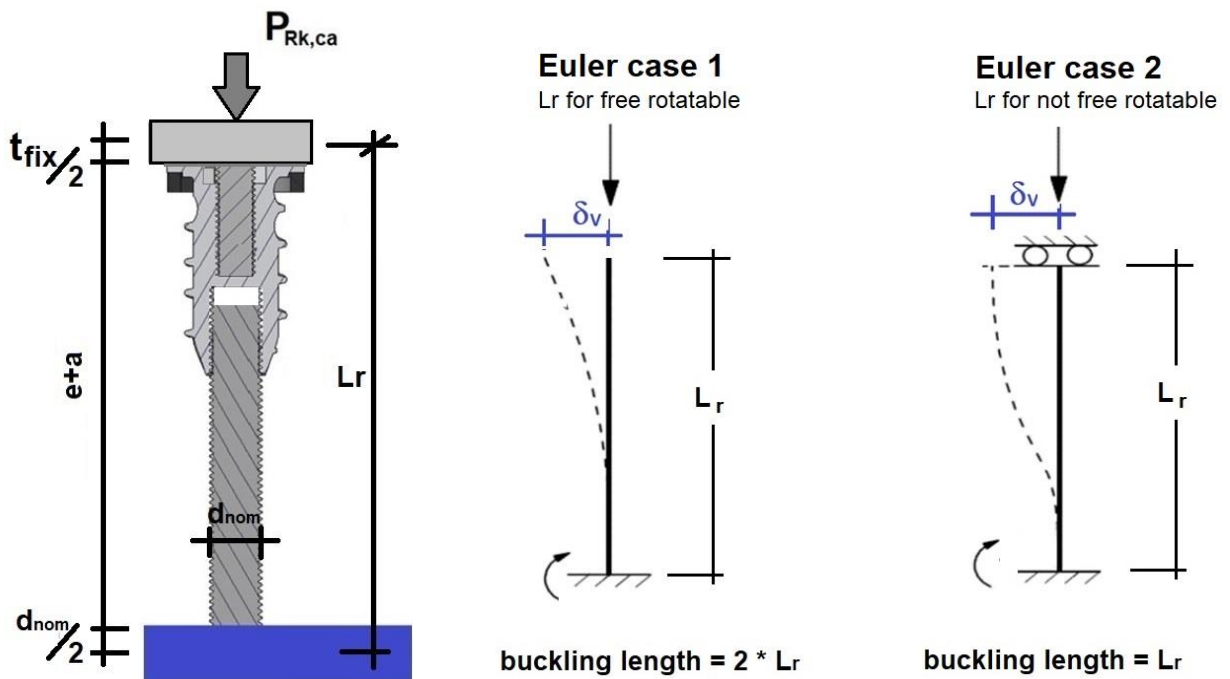

UNI-RT 12, UNI-RT 16						
Type	Insulation thickness (incl. insulation plaster and $t_{tot}$ )	Max. shear load displacement		Free rotatable (Euler case 1)	Not free rotatable (Euler case 2)	Safety factor
	$h_D$	$\delta_v$	$L_r$	Char. buckling load resistance	Char. buckling load resistance	$\gamma_{Mca}^*$
	[mm]	[mm]	[mm]	$P_{Rk,ca}$ [kN]	$P_{Rk,ca}$ [kN]	[-]
UNI-RT 12	60 - 120	5	136,4	$\geq 15,8^{**}$	$\geq 25,2$	1,3
UNI-RT 12	121 - 160	5	176,4	$\geq 9,4^{**}$	$\geq 25,2$	1,3
UNI-RT 12	161 - 220	5	236,4	$\geq 5,2^{**}$	$\geq 21,0^{**}$	1,3
UNI-RT 16	60 - 220	5	238,4	$\geq 17,9^{**}$	$\geq 22,7$	1,3
UNI-RT 16	221 - 300	5	318,4	$\geq 10,0^{**}$	$\geq 22,7$	1,3

\*  $\gamma_{Mca}$  for buckling in accordance with TR 077

\*\* calculated values in accordance with Euler cases were decisive for the determination of performance values apply to steel grade 8.8

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Performances**  
Characteristic buckling load under pressure load

**Annex C2**

**Table C3.1: Characteristic tensile load resistance  $N_{Rk}$  against short- and long-term acting loads for the thermal separation module**

UNI-RT 12, UNI-RT 16		
Type	24°C/40°C and 50°C/80°C	safety factor
	$N_{Rk}$	$\gamma_{Mtk}^*$
	[kN]	[-]
UNI-RT 12	18	2,5
UNI-RT 16	16	2,5

\*  $\gamma_{Mtk}$  for plastic material Polyamide in accordance with TR 077

The min. screw in depths of the threaded studs ( $L_{s1}$ ,  $L_{s2}$ ) must be observed

**Table C3.2: Characteristic pressure load resistance  $P_{Rk}$  against short- and long-term acting loads for thermal separation module**

UNI-RT 12, UNI-RT 16		
Type	24°C/40°C and 50°C/80°C	safety factor
	$P_{Rk}$	$\gamma_{Mtk}$
	[kN]	[-]
UNI-RT 12	18	2,5
UNI-RT 16	18	2,5

\*  $\gamma_{Mtk}$  for plastic material Polyamide in accordance with TR 077

Pressure load in base material must be considered


RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

### Performances


Characteristic tensile and pressure resistance of thermal separation module

**Annex C3**

**Table C4.1: Characteristic shear load resistance  $V_{Rk,pol}$  against short- and long-term acting loads for a single thermal separation module - free end rotatable**

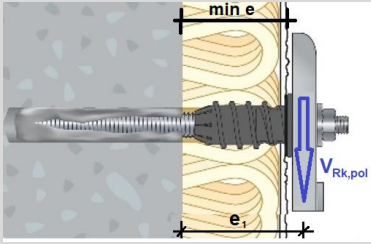UNI-RT 12, UNI-RT 16					
					
Type	short-term 24°C/40°C	long-term 24°C/40°C	short-term 50°C/80°C	long-term 50°C/80°C	Safety factor
	$V_{Rk,pol}$	$V_{Rk,pol}$	$V_{Rk,pol}$	$V_{Rk,pol}$	$\gamma_{Mtk}$
	[kN]	[kN]	[kN]	[kN]	[-]
UNI-RT 12	5,0	5,0	5,0	3,5	2,5
UNI-RT 16	6,5	6,5	6,5	4,5	2,5

**Table C4.2: Characteristic shear load resistance  $V_{Rk,pol}$  against short- and long-term acting loads for a single thermal separation module - free end not rotatable**

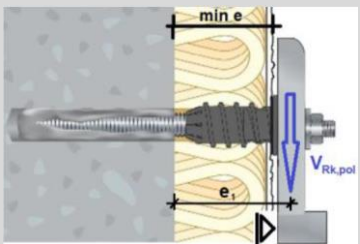UNI-RT 12, UNI-RT 16					
					
Type	short-term 24°C/40°C	long-term 24°C/40°C	short-term 50°C/80°C	long-term 50°C/80°C	Safety factor
	$V_{Rk,pol}$	$V_{Rk,pol}$	$V_{Rk,pol}$	$V_{Rk,pol}$	$\gamma_{Mtk}$
	[kN]	[kN]	[kN]	[kN]	[-]
UNI-RT 12	5,0	5,0	5,0	3,5	2,5
UNI-RT 16	7,5	7,5	7,5	5,0	2,5

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Performances**

Char. shear load resistance for a single thermal separation module

**Annex C4**

**Table C5.1: Shear load V values for single UNI-RT 12 for displacements  
w = 1, 2, 3, 4 or 5 mm, free end rotatable, under short-term acting load**

UNI-RT 12 (free end rotatable; short-term acting load)										
For insulation thickness incl. insulation's plaster and $t_{tol}$ if applicable	Temp. 24°C / 40°C Shear load V					Temp. 50°C / 80°C Shear load V				
	[kN]					[kN]				
	Deviation w					Deviation w				
[mm]	1 mm	2 mm	3 mm	4 mm	5 mm	1 mm	2 mm	3 mm	4 mm	5 mm
60	0,55	0,90	1,25	1,43	1,43	0,55	0,90	1,25	1,43	1,43
80	0,35	0,60	0,85	1,10	1,35	0,35	0,60	0,85	1,10	1,35
100	0,24	0,42	0,61	0,78	0,96	0,24	0,42	0,61	0,78	0,96
120	0,12	0,24	0,36	0,46	0,56	0,12	0,24	0,36	0,46	0,56
140	0,10	0,20	0,31	0,39	0,48	0,10	0,20	0,31	0,39	0,48
160	0,08	0,17	0,25	0,32	0,40	0,08	0,17	0,25	0,32	0,40
180	0,07	0,13	0,20	0,26	0,31	0,07	0,13	0,20	0,26	0,31
200	0,05	0,10	0,14	0,19	0,23	0,05	0,10	0,14	0,19	0,23
220	0,03	0,06	0,09	0,12	0,15	0,03	0,06	0,09	0,12	0,15

Intermediate values can be interpolated. Data are limited due to ultimate limit state verifications of the performance given in Annex C4 under consideration of  $\gamma_M=2.5$  and  $\gamma_F=1.4$

**Table C5.2: Shear load V values for single UNI-RT 12 for displacements  
w = 1, 2, 3, 4 or 5 mm, free end rotatable, under long-term acting load**

UNI-RT 12 (free end rotatable; long-term acting load)										
For insulation thickness incl. insulation's plaster and $t_{tol}$ if applicable	Temp. 24°C / 40°C Shear load V					Temp. 50°C / 80°C Shear load V				
	[kN]					[kN]				
	Deviation w					Deviation w				
[mm]	1 mm	2 mm	3 mm	4 mm	5 mm	1 mm	2 mm	3 mm	4 mm	5 mm
60	0,55	0,90	1,25	1,43	1,43	0,39	0,63	0,88	1,00	1,00
80	0,35	0,60	0,85	1,10	1,35	0,25	0,42	0,60	0,77	0,95
100	0,24	0,42	0,61	0,78	0,96	0,16	0,29	0,42	0,55	0,67
120	0,12	0,24	0,36	0,46	0,56	0,08	0,17	0,25	0,32	0,39
140	0,10	0,20	0,31	0,39	0,48	0,07	0,14	0,21	0,27	0,33
160	0,08	0,17	0,25	0,32	0,40	0,06	0,12	0,18	0,23	0,28
180	0,07	0,13	0,20	0,26	0,31	0,05	0,09	0,14	0,18	0,22
200	0,05	0,10	0,14	0,19	0,23	0,03	0,07	0,10	0,13	0,16
220	0,03	0,06	0,09	0,12	0,15	0,02	0,04	0,06	0,08	0,11


Intermediate values can be interpolated/ Data are limited due to ultimate limit state verifications of the performance given in Annex C4 under consideration of  $\gamma_M=2.5$  and  $\gamma_F=1.4$

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Performances**  
Displacement under shear load

**Annex C5**


**Table C6.1: Shear load V values for a single dimos anchor UNI-RT 12 for displacements w = 1, 2, 3, 4 or 5 mm, free end not rotatable, under short-term acting load**



UNI-RT 12 (free end <u>not</u> rotatable; short-term acting load)										
For insulation thickness incl. insulation's plaster and t <sub>tol</sub> if applicable	Temp. 24°C / 40°C Shear load V					Temp. 50°C / 80°C Shear load V				
	[kN]					[kN]				
	Deviation w					Deviation w				
[mm]	1 mm	2 mm	3 mm	4 mm	5 mm	1 mm	2 mm	3 mm	4 mm	5 mm
60	1,30	1,43	1,43	1,43	1,43	1,30	1,43	1,43	1,43	1,43
80	0,77	1,43	1,43	1,43	1,43	0,77	1,43	1,43	1,43	1,43
100	0,57	1,09	1,43	1,43	1,43	0,57	1,09	1,43	1,43	1,43
120	0,36	0,70	1,01	1,27	1,43	0,36	0,70	1,01	1,27	1,43
140	0,31	0,59	0,85	1,07	1,29	0,31	0,59	0,85	1,07	1,29
160	0,25	0,48	0,69	0,88	1,06	0,25	0,48	0,69	0,88	1,06
180	0,20	0,37	0,54	0,68	0,82	0,20	0,37	0,54	0,68	0,82
200	0,14	0,27	0,38	0,48	0,59	0,14	0,27	0,38	0,48	0,59
220	0,08	0,16	0,22	0,29	0,35	0,08	0,16	0,22	0,29	0,35

Intermediate values can be interpolated/ Data are limited due to ultimate limit state verifications of the performance given in Annex C4 under consideration of  $\gamma_M=2.5$  and  $\gamma_F=1.4$

**Table C6.2: Shear load V values for a single dimos anchor UNI-RT 12 for displacements w = 1, 2, 3, 4 or 5 mm, free end not rotatable, under long-term acting load**



UNI-RT 12 (free end <u>not</u> rotatable; long-term acting load)										
For insulation thickness incl. insulation's plaster and t <sub>tol</sub> if applicable	Temp. 24°C / 40°C Shear load V					Temp. 50°C / 80°C Shear load V				
	[kN]					[kN]				
	Deviation w					Deviation w				
[mm]	1 mm	2 mm	3 mm	4 mm	5 mm	1 mm	2 mm	3 mm	4 mm	5 mm
60	1,30	1,43	1,43	1,43	1,43	0,91	1,00	1,00	1,00	1,00
80	0,77	1,43	1,43	1,43	1,43	0,54	1,00	1,00	1,00	1,00
100	0,57	1,09	1,43	1,43	1,43	0,40	0,76	1,00	1,00	1,00
120	0,36	0,70	1,01	1,27	1,43	0,25	0,49	0,71	0,89	1,00
140	0,31	0,59	0,85	1,07	1,29	0,21	0,41	0,60	0,75	0,91
160	0,25	0,48	0,69	0,88	1,06	0,18	0,34	0,49	0,61	0,74
180	0,20	0,37	0,54	0,68	0,82	0,14	0,26	0,38	0,48	0,58
200	0,14	0,27	0,38	0,48	0,59	0,10	0,19	0,27	0,34	0,41
220	0,08	0,16	0,22	0,29	0,35	0,06	0,11	0,16	0,20	0,25

Intermediate values can be interpolated/ Data are limited due to ultimate limit state verifications of the performance given in Annex C4 under consideration of  $\gamma_M=2.5$  and  $\gamma_F=1.4$

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Performances**  
Displacement under shear load

**Annex C6**

**Table C7.1: Shear load V values for a single dimos anchor UNI-RT 16 for displacements w = 1, 2, 3, 4 or 5 mm, free end rotatable, under short-term acting load**

UNI-RT 16 (free end rotatable; short-term acting load)										
For insulation thickness incl. insulation's plaster and t <sub>tol</sub> if applicable	Shear load V Temp. 24°C / 40°C					Shear load V Temp. 50°C / 80°C				
	[kN]					[kN]				
	Deviation w					Deviation w				
[mm]	1 mm	2 mm	3 mm	4 mm	5 mm	1 mm	2 mm	3 mm	4 mm	5 mm
60	0,58	1,06	1,59	1,86	1,86	0,58	1,06	1,59	1,86	1,86
80	0,50	0,96	1,38	1,76	1,86	0,50	0,96	1,38	1,76	1,86
100	0,39	0,74	1,06	1,37	1,66	0,39	0,74	1,06	1,37	1,66
120	0,29	0,52	0,75	0,97	1,19	0,29	0,52	0,75	0,97	1,19
140	0,24	0,44	0,63	0,82	1,00	0,24	0,44	0,63	0,82	1,00
160	0,20	0,36	0,52	0,67	0,82	0,20	0,36	0,52	0,67	0,82
180	0,15	0,28	0,41	0,52	0,64	0,15	0,28	0,41	0,52	0,64
200	0,13	0,25	0,36	0,46	0,56	0,13	0,25	0,36	0,46	0,56
220	0,11	0,22	0,31	0,40	0,49	0,11	0,22	0,31	0,40	0,49
240	0,10	0,18	0,26	0,34	0,42	0,10	0,18	0,26	0,34	0,42
250	0,09	0,17	0,24	0,31	0,38	0,09	0,17	0,24	0,31	0,38
260	0,08	0,15	0,21	0,28	0,34	0,08	0,15	0,21	0,28	0,34
280	0,06	0,12	0,17	0,22	0,27	0,06	0,12	0,17	0,22	0,27
300	0,05	0,08	0,12	0,16	0,19	0,05	0,08	0,12	0,16	0,19

Intermediate values can be interpolated/ Data are limited due to ultimate limit state verifications of the performance given in Annex C4 under consideration of  $\gamma_M=2.5$  and  $\gamma_F=1.4$

**Table C7.2: Shear load V values for a single dimos anchor UNI-RT 16 for displacements w = 1, 2, 3, 4 or 5 mm, free end rotatable, under long-term acting load**

UNI-RT 16 (free end rotatable; long-term acting load)										
For insulation thickness incl. insulation's plaster and t <sub>tol</sub> if applicable	Shear load V Temp. 24°C / 40°C					Shear load V Temp. 50°C / 80°C				
	[kN]					[kN]				
	Deviation w					Deviation w				
[mm]	1 mm	2 mm	3 mm	4 mm	5 mm	1 mm	2 mm	3 mm	4 mm	5 mm
60	0,58	1,06	1,59	1,86	1,86	0,41	0,75	1,11	1,30	1,30
80	0,50	0,96	1,38	1,76	1,86	0,35	0,67	0,97	1,23	1,30
100	0,39	0,74	1,06	1,37	1,66	0,27	0,52	0,74	0,96	1,16
120	0,29	0,52	0,75	0,97	1,19	0,20	0,36	0,52	0,68	0,83
140	0,24	0,44	0,63	0,82	1,00	0,17	0,31	0,44	0,58	0,70
160	0,20	0,36	0,52	0,67	0,82	0,14	0,25	0,36	0,47	0,57
180	0,15	0,28	0,41	0,52	0,64	0,10	0,20	0,28	0,37	0,45
200	0,13	0,25	0,36	0,46	0,56	0,09	0,17	0,25	0,32	0,39
220	0,11	0,22	0,31	0,40	0,49	0,08	0,15	0,22	0,28	0,34
240	0,10	0,18	0,26	0,34	0,42	0,07	0,13	0,18	0,24	0,29
250	0,09	0,17	0,24	0,31	0,38	0,06	0,12	0,17	0,22	0,27
260	0,08	0,15	0,21	0,28	0,34	0,06	0,10	0,15	0,19	0,24
280	0,06	0,12	0,17	0,22	0,27	0,04	0,08	0,12	0,15	0,19
300	0,05	0,08	0,12	0,16	0,19	0,03	0,06	0,08	0,11	0,14

Intermediate values can be interpolated/ Data are limited due to ultimate limit state verifications of the performance given in Annex C4 under consideration of  $\gamma_M=2.5$  and  $\gamma_F=1.4$

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Performances**  
Displacement under shear load

**Annex C7**

**Table C8.1: Shear load V values for a single dimos anchor UNI-RT 16 for displacements w = 1, 2, 3, 4 or 5 mm, free end not rotatable, under short-term acting load**

UNI-RT 16 (free end <u>not</u> rotatable; short-term acting load)										
For insulation thickness incl. insulation's plaster and t <sub>tol</sub> if applicable	Shear load V Temp. 24°C / 40°C					Shear load V Temp. 50°C / 80°C				
	[kN]					[kN]				
	Deviation w					Deviation w				
[mm]	1 mm	2 mm	3 mm	4 mm	5 mm	1 mm	2 mm	3 mm	4 mm	5 mm
60	1,94	2,14	2,14	2,14	2,14	1,94	2,14	2,14	2,14	2,14
80	1,30	2,14	2,14	2,14	2,14	1,30	2,14	2,14	2,14	2,14
100	0,99	1,82	2,14	2,14	2,14	0,99	1,82	2,14	2,14	2,14
120	0,68	1,28	1,84	2,14	2,14	0,68	1,28	1,84	2,14	2,14
140	0,55	1,04	1,49	1,89	2,14	0,55	1,04	1,49	1,89	2,14
160	0,42	0,79	1,15	1,46	1,76	0,42	0,79	1,15	1,46	1,76
180	0,29	0,55	0,80	1,04	1,27	0,29	0,55	0,80	1,04	1,27
200	0,25	0,49	0,71	0,92	1,12	0,25	0,49	0,71	0,92	1,12
220	0,22	0,42	0,61	0,79	0,97	0,22	0,42	0,61	0,79	0,97
240	0,18	0,35	0,51	0,67	0,82	0,18	0,35	0,51	0,67	0,82
250	0,17	0,32	0,47	0,60	0,74	0,17	0,32	0,47	0,60	0,74
260	0,15	0,29	0,42	0,54	0,67	0,15	0,29	0,42	0,54	0,67
280	0,12	0,22	0,32	0,42	0,51	0,12	0,22	0,32	0,42	0,51
300	0,08	0,15	0,22	0,29	0,36	0,08	0,15	0,22	0,29	0,36

Intermediate values can be interpolated/ Data are limited due to ultimate limit state verifications of the performance given in Annex C4 under consideration of  $\gamma_M=2.5$  and  $\gamma_F=1.4$

**Table C8.2: Shear load V values for a single dimos anchor UNI-RT 16 for displacements w = 1, 2, 3, 4 or 5 mm, free end not rotatable, under long-term acting load**

UNI-RT 16 (free end <u>not</u> rotatable; long-term acting load)										
For insulation thickness incl. insulation's plaster and t <sub>tol</sub> if applicable	Shear load V Temp. 24°C / 40°C					Shear load V Temp. 50°C / 80°C				
	[kN]					[kN]				
	Deviation w					Deviation w				
[mm]	1 mm	2 mm	3 mm	4 mm	5 mm	1 mm	2 mm	3 mm	4 mm	5 mm
60	1,94	2,14	2,14	2,14	2,14	1,36	1,43	1,43	1,43	1,43
80	1,30	2,14	2,14	2,14	2,14	0,91	1,43	1,43	1,43	1,43
100	0,99	1,82	2,14	2,14	2,14	0,69	1,27	1,43	1,43	1,43
120	0,68	1,28	1,84	2,14	2,14	0,48	0,90	1,29	1,43	1,43
140	0,55	1,04	1,49	1,89	2,14	0,39	0,73	1,04	1,32	1,43
160	0,42	0,79	1,15	1,46	1,76	0,29	0,56	0,80	1,03	1,23
180	0,29	0,55	0,80	1,04	1,27	0,20	0,39	0,56	0,73	0,89
200	0,25	0,49	0,71	0,92	1,12	0,18	0,34	0,50	0,64	0,78
220	0,22	0,42	0,61	0,79	0,97	0,15	0,29	0,43	0,55	0,68
240	0,18	0,35	0,51	0,67	0,82	0,13	0,25	0,36	0,47	0,57
250	0,17	0,32	0,47	0,60	0,74	0,12	0,22	0,33	0,42	0,52
260	0,15	0,29	0,42	0,54	0,67	0,11	0,20	0,29	0,38	0,47
280	0,12	0,22	0,32	0,42	0,51	0,08	0,15	0,22	0,29	0,36
300	0,08	0,15	0,22	0,29	0,36	0,06	0,11	0,16	0,20	0,25

Intermediate values can be interpolated/ Data are limited due to ultimate limit state verifications of the performance given in Annex C4 under consideration of  $\gamma_M=2.5$  and  $\gamma_F=1.4$

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Performances**  
Displacement under shear load

**Annex C8**

**Table C9.1: Displacements of the fixing system under tension load, temp. range 24°C/ 40°C**

Fixing system	Tension load	Displacement	Displacement
	N	$\delta_{NO}$	$\delta_{N\infty}$
	[kN]	[mm]	[mm]
UNI-RT 12 (M12 threaded rod)	5,14	0,47	0,94
UNI-RT 16 (M16 threaded rod)	4,57	0,32	0,64

The displacement in the base material must be added

**Table C9.2: Displacements of the fixing system under pressure load, temp. range 24°C/40°C**

Fixing system	Pressure load	Displacement	Displacement
	P	$\delta_{PO}$	$\delta_{P\infty}$
	[kN]	[mm]	[mm]
UNI-RT 12 (M12 threaded rod)	5,14	0,31	0,62
UNI-RT 16 (M16 threaded rod)	5,14	0,31	0,62

The displacement in the base material must be added

**Table C9.3: Displacements of the fixing system under tension load, temp. range 50°C/ 80°C**

Fixing system	Tension load	Displacement	Displacement
	N	$\delta_{NO}$	$\delta_{N\infty}$
	[kN]	[mm]	[mm]
UNI-RT 12 (M12 threaded rod)	5,14	0,47	0,94
UNI-RT 16 (M16 threaded rod)	4,57	0,32	0,64

The displacement in the base material must be added

**Table C9.4: Displacements of the fixing system under pressure load, temp. range 50°C/ 80°C**

Fixing system	Pressure load	Displacement	Displacement
	P	$\delta_{PO}$	$\delta_{P\infty}$
	[kN]	[mm]	[mm]
UNI-RT 12 (M12 threaded rod)	5,14	0,31	0,62
UNI-RT 16 (M16 threaded rod)	5,14	0,31	0,62

The displacement in the base material must be added

RECA dimos anchor UNI-RT 12, RECA dimos anchor UNI-RT 16

**Performances**  
Displacement under tension and pressure load

**Annex C9**